

# GUARDIAN® 7000

ULTRA STRONG LAYERED  
SECURITY MESH, CONSTRUCTED  
WITHIN A MODULAR FRAMEWORK

ASTM F2781-15 TESTED AND CERTIFIED  
4.5 MINUTE AGGRESSIVE THREAT DELAY\*  
EASY INSTALLATION, UPGRADE, REPAIR  
AND MAINTENANCE  
SEAMLESS SECURITY INTEGRATION

SECURITY LEVEL



\*Threat levels as determined by ASTM 2781-15 standard

PROTECTING THE FUTURE, TODAY.™

[guardiar.com](http://guardiar.com)

**THE GUARDIAN FENCE SYSTEM® IS AN IMPOSING HIGH-SECURITY FENCING SYSTEM THAT PROVIDES UNRIVALED PROTECTION COMBINED WITH INTEGRATED RACEWAYS FOR SEAMLESS SECURITY INTEGRATION.**

**ASTM TESTED PROTECTION**

Independently tested and certified to ASTM\* standards for breakthrough and ballistic resistance. The Guardian 7000 series strongly resists both cutting attempts and ballistic attacks due to its double layered mesh. Delivering 4.5 min delay against Aggressive threat level and over 14 minutes against Medium threat level\*\*.

**ENGINEERED DESIGN**

Steel rails within the system create a protective raceway for security component cabling such as intrusion detection, surveillance, and access control; providing a superior, fully-integrated security barrier, allowing ease of installation, upgrade, repair, and maintenance.

**EFFICIENT INSTALLATION**

Panels are affixed to steel rails, which are attached to steel posts. This smart fence platform configuration allows for fast installation without exact post spacings required.

**ANTI-RAM BARRIER ADD ON**

M30, M40 and M50 Rated Anti-Ram Barriers can be integrated into the Guardian 7000 using the existing posts to provide hostile vehicle mitigation along the perimeter fence line.

**HIGH-SECURITY GUARDIAN UNIONS**

Guardian Unions securely connect panels to high-strength horizontal rails within the Guardian Fence System® and is then secured with bolted steel straps adding additional rigidity to the fence.

**GATES**

Strong and secure anti-cut, anti-climb, and anti-ram gates are available in a full range of styles.

**COATING**

High quality galvanized steel and aluminum components deliver a longer service life. The Guardian Fence System® is also available with a super-durable, architectural grade powder coating. This prolongs protection against UV rays and salt spray.

**WARRANTY**

Backed by a 10-Year Manufacturer’s Warrant.


**SPECIFICATION**



Description	Name	Size	Screening %	% Open area	Thickness		Lbs per 100 sq ft		Short opening size	Long opening size
					Strand width	Strand Thickness	Plain	Hot Dipped		
Welded Wire	DutyGuard 3-5-8M	3" x 1/2" x 8ga Double Layer	50.4%	49.6%	0.162		315	338	0.338	0.338
MiniLouver 75	Minilouver 75	Minilouver 75	75%	25%	0.188	0.09	282	310	0.25	0.8
Expanded Metal	Sentry 34-9	3/4" x #9	32%	68%	0.15	0.135	180	198	0.688	1.562

Additional options available. Contact us for a solution that meets your specific security requirements.

\*Tested in accordance with ASTM F2781-10 requirements | \*\*Threat levels as determined by ASTM 2781-15 standard

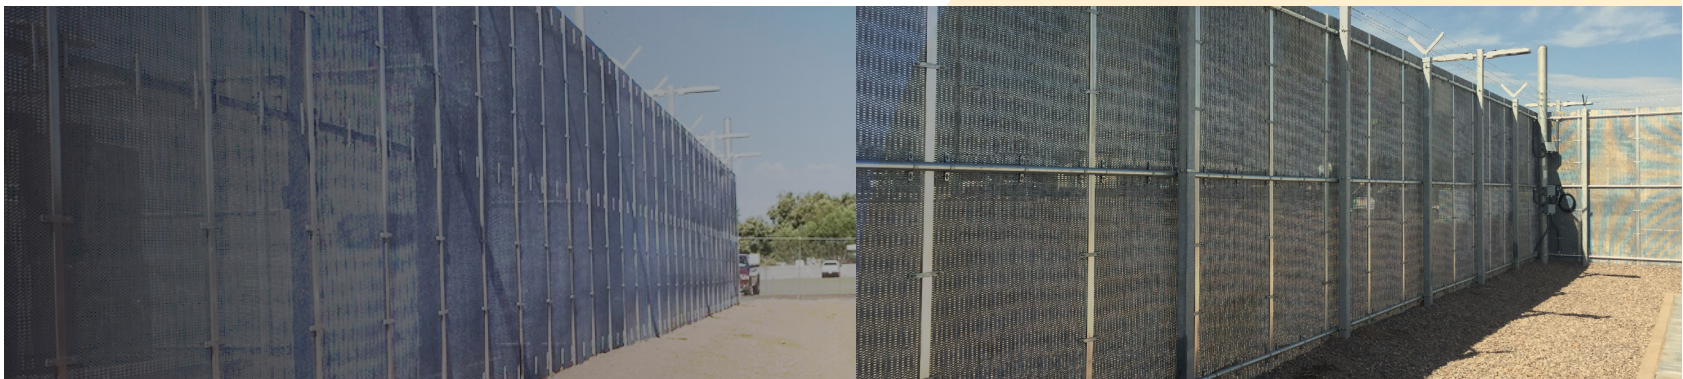

For more information contact us at 504-948-8625 or email [orders@altamax.net](mailto:orders@altamax.net)



USA: 3309 SW Interstate 45 Ennis, TX 75119, USA | TEL: +1 972 878 7000



[guardian.com/contact](http://guardian.com/contact)

Guardian and the product names identified in this publication are registered trademarks owned by PRÆSIDIAD Group Limited. All rights reserved. Proud to be a PRÆSIDIAD brand, Guardian is part of a global network, working alongside Betafence and Hesco as a leader in perimeter security systems and solutions. For more information please visit [praesidiad.com](http://praesidiad.com).